

UHF DUAL CHANNEL SYSTEM

KST-5U

HANDHELD TRANSMITTER SPECIFICATIONS

RF Frequency Range: 460-970MHz
 RF Output: > 10dBm
 Modulation Type: FM
 Max Deviation: ± 40 KHz
 Spurious Emission: > 55dBc
 Nominal Current Drain: < 40mA
 Power Requirements: 9V DC
 Dimensions: 23x5x5cm

KLT-8U

BODYPACK TRANSMITTER SPECIFICATIONS


RF Frequency Range: 460-970MHz
 RF Output: > 10dBm
 Modulation Type: FM
 Max Deviation: ± 40 KHz
 Spurious Emission: > 53dBc
 Nominal Current Drain: < 40mA
 Power Requirements: 9V DC
 Dimensions: 10.5x6.5x2.5cm



! KST-5U
HANDHELD TRANSMITTER



! KLT-8U
BODYPACK TRANSMITTER



Top View

KRU-302 SERIES >>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

SYSTEM FEATURES

- ※ UHF 800MHz operation frequency
- ※ Dual channel operation
- ※ Extreme low THD and super fidelity
- ※ Switch impact noise defeat circuit
- ※ Double squelch operation circuit, higher efficient and much more steady.
- ※ Balanced XLR and unbalanced 1/4" outputs.


KRU-302

RECEIVER SPECIFICATIONS

RF Frequency Range: 460-970MHz
 Receiving Sensitivity: -105dBm (S/N: -12dB 25KHz)
 Image & Spurious Rejection: > 70dB
 Signal/Noise Ratio: > 85dB
 Border Upon Channel Rejection: > 70dB
 T.H.D.: < 0.5%
 Audio Output Level: 0- ± 300 mV
 Power Requirements: 12-18V DC nominal 300mA
 Dimensions: 21.3x15x4.3cm




! KRU-302
DUAL CHANNEL RECEIVER

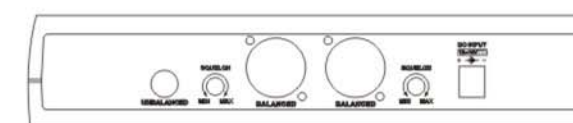

Rear Panel

HANDHELD



Receiver: KRU-302
 Handheld Mic: KST-5U

LAVALIER



Receiver: KRU-302
 Bodypack Transmitter: KLT-8U
 Lavalier Mic: LT-4A

HEADWORN



Receiver: KRU-302
 Bodypack Transmitter: KLT-8U
 Headworn Mic: HT-2

GUITAR/BASS



Receiver: KRU-302
 Bodypack Transmitter: KLT-8U
 Guitar Cable: G-05

DUAL CHANNEL COMBO



Receiver: KRU-302
 Handheld Mic: KST-5U
 Bodypack Transmitter: KLT-8U
 Lavalier Mic: LT-4A
 Headworn Mic: HT-2
 Guitar Cable: G-05