




AVS-LED-W45

LED PROFILE WASH 100


www.avshk.com



- 電源輸入：AC100V-240V, 50Hz/60Hz
- 額定功率：150W
- 燈珠：COB 集成，100W，白光
- 光通量：7000lm – 8000lm
- 燈珠壽命：>50,000 小時
- 色溫：3200K 或 5600K 可選
- 顯色指數 (CRI): $\geq 85Ra$ 或 $\geq 95Ra$ 可選
- 調光：0-100% 線性調光
- 出光角度：45°
- 頻閃：多種頻閃功能，1-20 次 / 秒
- 散熱：高品質散熱器配無噪音風扇
- 顯示：LED 顯示
- 控制模式：國際標準的 DMX 512 信號，配有 XLR3Pin 與 XLR5Pin 兩種信號插座
- 通道模式：1 通道與 2 通道兩種通道模式，可自行設定
- 防護等級：IP20
- 使用環境溫度：-20° – 45°
- 淨重：5.2kgs ● 毛重：6.9kgs
- 包裝尺寸：310mm (長) x 276mm (闊) x 241mm (高)



- Power Supply: AC100V-240V, 50Hz/60Hz
- Power Consumption: 150W
- Lamp: COB Led 100W, White
- Luminous flux: 7000lm – 8000lm
- Lifetime of led: More than 50000 hours
- Color Temperature: 3200K and 5600K are available
- CRI: $\geq 85Ra$ or $\geq 95Ra$
- LED life: >50,000H
- Dimmer: 0-100% Linear Dimmer
- Beam angle: 45°
- Strobe: 1-20 Flash per second
- High quality radiator, fan without noise
- Display: LCD display
- Control mode: International standard DMX 512 signal, with XLR3Pin and XLR5Pin connectors
- Channel mode: 1 channel mode and 2 channels mode
- Protection grade: IP20
- Environment temperature: -20°C – 45°C
- N.W.: 5.2kgs ● G.W.: 6.9kgs
- Dimensions: 310mm (L) x 276mm (W) x 241mm (H)

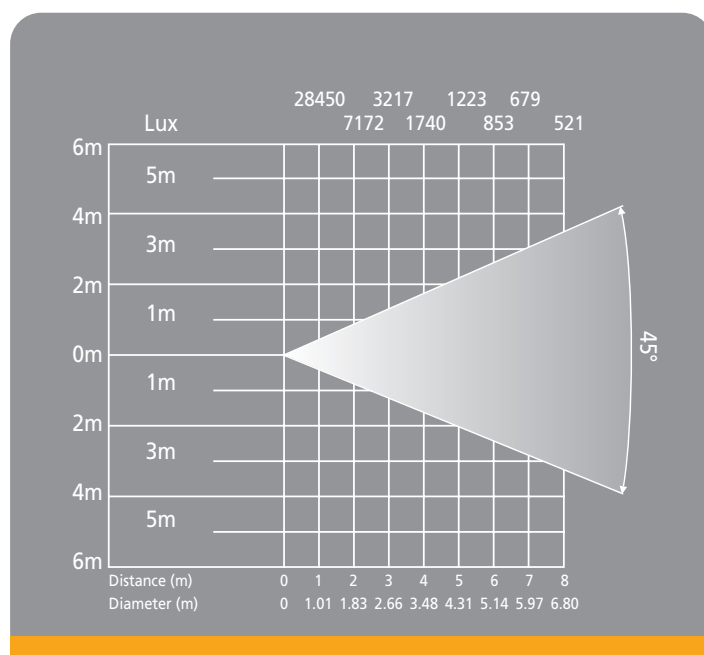

| DMX CONTROL CHANNEL | | | | Mode 1 | Mode 2 |
|---------------------|------------------------|------------------|---------|--------|--------|
| 1 | Dimmer Intensity 調光 | 000-007 (0-100%) | 008-255 | CH 1 | CH1 |
| 2 | Strobe 頻閃 | 000 001 | 255 | CH2 | |