




Stage Par 300 ZOOM

MP-300Z

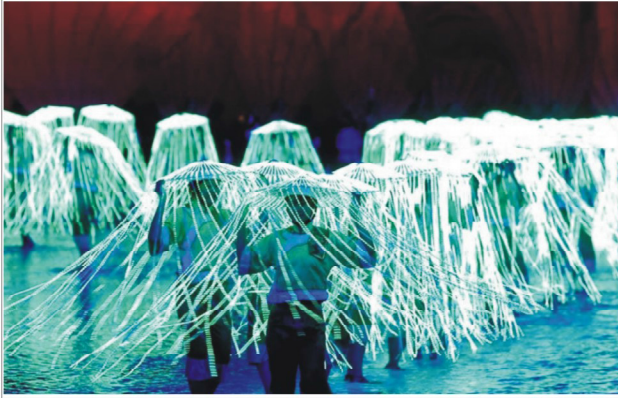

Specifications

Light Sources: 19pcs OSRAM OSTAR LED
Beam Angle: 10° ~ 60°

Control

DMX Channel: 5/6/8 Channel
Control Modes: DMX, Master/Slave
Firmware Upgrade: Update via DMX link

Construction

Display: LCD display
Data In/Out Socket: 3-pin & 5-pin XLR sockets
Power Socket: Powercon in/out
Protection Rating: IP20


Electrical and Physical

Power Consumption: 220W
Power Voltage: AC 100 -240V, 50/60Hz
Dimension: 276 x 325 x 344mm
Weight: 7.2Kgs

Features

Motorized linear zoom system, zoom range 10° ~ 60°
Die-cast aluminum housing
Outstanding color macro effect
Dimmer: 0~100% smooth dimming
Variable strobe speed

Photometrics diagram

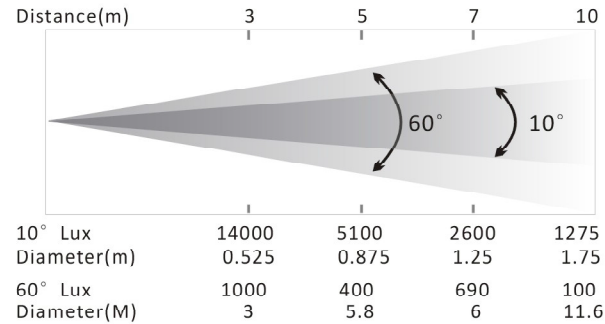

Dimension(mm)

