


All models out to the CLA series designed for

- Excellent sound
- Compact size
- Low weight
- versatile
- Versatile setup combinations
- Bi-Amplifier or singal-Amplifier

CLA-1503x


A 2-way full range system in a trapezoidal enclosure. Includes dual 15inch(75mm voice coil) Ferrite magnet LF driver and a 3inch(75mm voice coil) Ferrite magnet HF driver with a 90° horizontal horn,80°to 60°vertical horn. This cabinet has a very natural and clear sound which makes it an ideal match for our power mixing console. Combining the CLA-801 with our CLA-218BQ . Subwoofer makes for CLA system with a deep and powerful bass response. The loudspeaker enclosure shall be rectangular in shape. It is constructed with 15mm thickness high-density plywood and employ extensive internal bracing support.




CLA-1503x
Full Range

CLA-18B

The CLA-18B is a self-contained passive high power subwoofer system with single 18inch(100mm voice coil) Ferrite magnet driver front loaded by a hyperbolic horn with low flare rate. The rear of the driver is reflex loaded to extend the LF output to below the natural cut-off point of the horn. Thus, it serves as a core model for portable live performance sound reinforcement systems and is ideal for corporate and industrial events. The CLA-1202x and CLA-1503x can supply extreme SPL within the recommended bandpass of 35-300Hz. The CLA-18B is a powered subwoofer. The loudspeaker enclosure is rectangular in shape. It is constructed with 18mm thickness high -density plywood and with extensive internal bracing support. The enclosure is in water-resistant textured black paint for wear resistance and durability. ss high density plywood and shall employ extensive internal bracing.

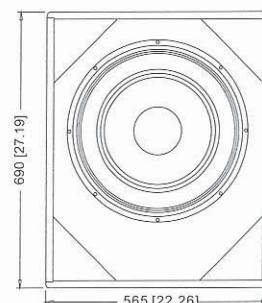

CLA-18B
Subwoofer

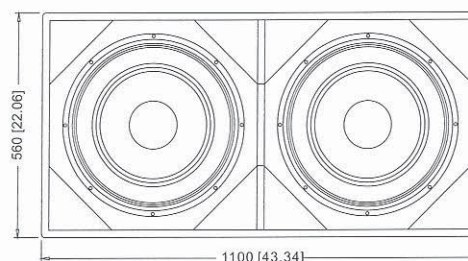

CLA-218B
Subwoofer

CLA Series

Model:	CLA-1503x	CLA-18B	CLA-218B
System Power Rating	500w AES, 2000w Peak	650w AES, 2600w Peak	1300w AES, 5200w Peak
Frequency Range(±3dB)	55Hz-20KHz	35Hz-300Hz	35Hz-300Hz
Impedance	8ohm	8ohm	4ohm
Sound Pressure Level(1w/1m)/max.cont.	100dB/130dB SPL	100dB/134dB SPL	101dB/135dB SPL
Coverage (H x V)	80° x 50°	----	----
Transducers LF	15inch LF Drivers	18inch LF Driver	2 x 18inch LF Driver
HF	3inch Compression Drivers	----	----
Dimensions wxhxd(inch)	17.02x28.57x30.73	22.26x27.19x23.64	44.88x17.72x32.31
wxhxd(millimetre)	432x725x388	565x690x600	1100x560x820
Weight(Kg)	30	45	90
Connectors	2 x Neutrik NL4 Speakon	2 x Neutrik NL4 Speakon	2 x Neutrik NL4 Speakon