

CLA Series

All models out for the CLA series designed for

- Excellent sound
- Compact size
- Low weight
- versatile
- Versatile setup combinations
- Bi-Amplifier or singal-Amplifier

Subwoofer


CLA-8801B

The CLA-8801B is a passive high power subwoofer system with single 18inch(125mm voice coil) ferrite magnet LF driver. The system is front loaded by a hyperbolic horn with low flare rate. The rear of the driver is reflex loaded to extend the LF output to below the natural cut-off point of the horn. Thus, it serves as a core model for portable live performance sound reinforcement speaker, it is an ideal choice for corporate and industrial events. The CLA-1202x, CLA-1503x can supply extreme SPL within the recommended bandpass of 40-300Hz. The loudspeaker enclosure is rectangular in shape and constructed with 18mm thickness high-density plywood, the enclosure constructs with an extensive internal bracing support.




CLA-8801B

Reflex Loaded Sub-woofer




CLA-8901B

The CLA-8901B is a passive high power subwoofer system with dual 18inch(125mm voice coil) ferrite magnet LF driver. The system is front loaded by a hyperbolic horn with low flare rate. The rear of the driver is reflex loaded to extend the LF output to below the natural cut-off point of the horn. Thus, it serves as a core model for portable live performance sound reinforcement speaker, it is an ideal choice for corporate and industrial events. The CLA-1202x, CLA-1503x can supply extreme SPL within the recommended bandpass of 40-300Hz. The loudspeaker enclosure is rectangular in shape and constructed with 18mm thickness high-density plywood, the enclosure constructs with an extensive internal bracing support.

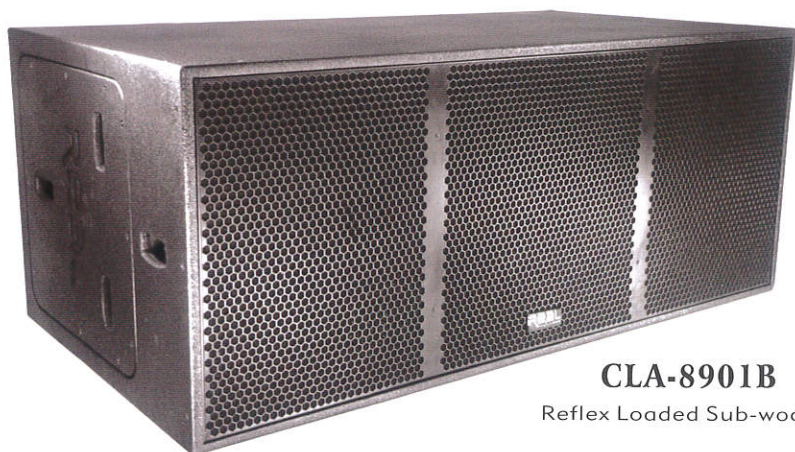

CLA-8901B

Reflex Loaded Sub-woofer

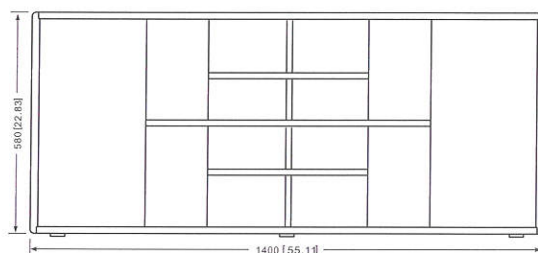

CLA Series

Model:	CLA-8801B	CLA-8901B
System Power Rating	700w AES, 5600w Peak	1400w AES, 5600w Peak
Frequency Range(±3dB)	35Hz-300Hz	35Hz-300Hz
Impedance	8ohm	4ohm
Sound Pressure Level(1w/1m)/max.cont.	100dB/139dB SPL	104dB/139dB SPL
Coverage	----	----
Transducers LF	18inch LF Driver	2x18inch LF Driver
M/HF	----	----
Dimensions wxhxd(Inch)	27.93x22.83x30.70	55.11x22.83x30.70
wxhxd(Millimeter)	709x580x780	1400x580x780
Weight(Kg)	65	120
Connectors	2 x Neutrik NL4 Speakon	2 x Neutrik NL4 Speakon

Specifications