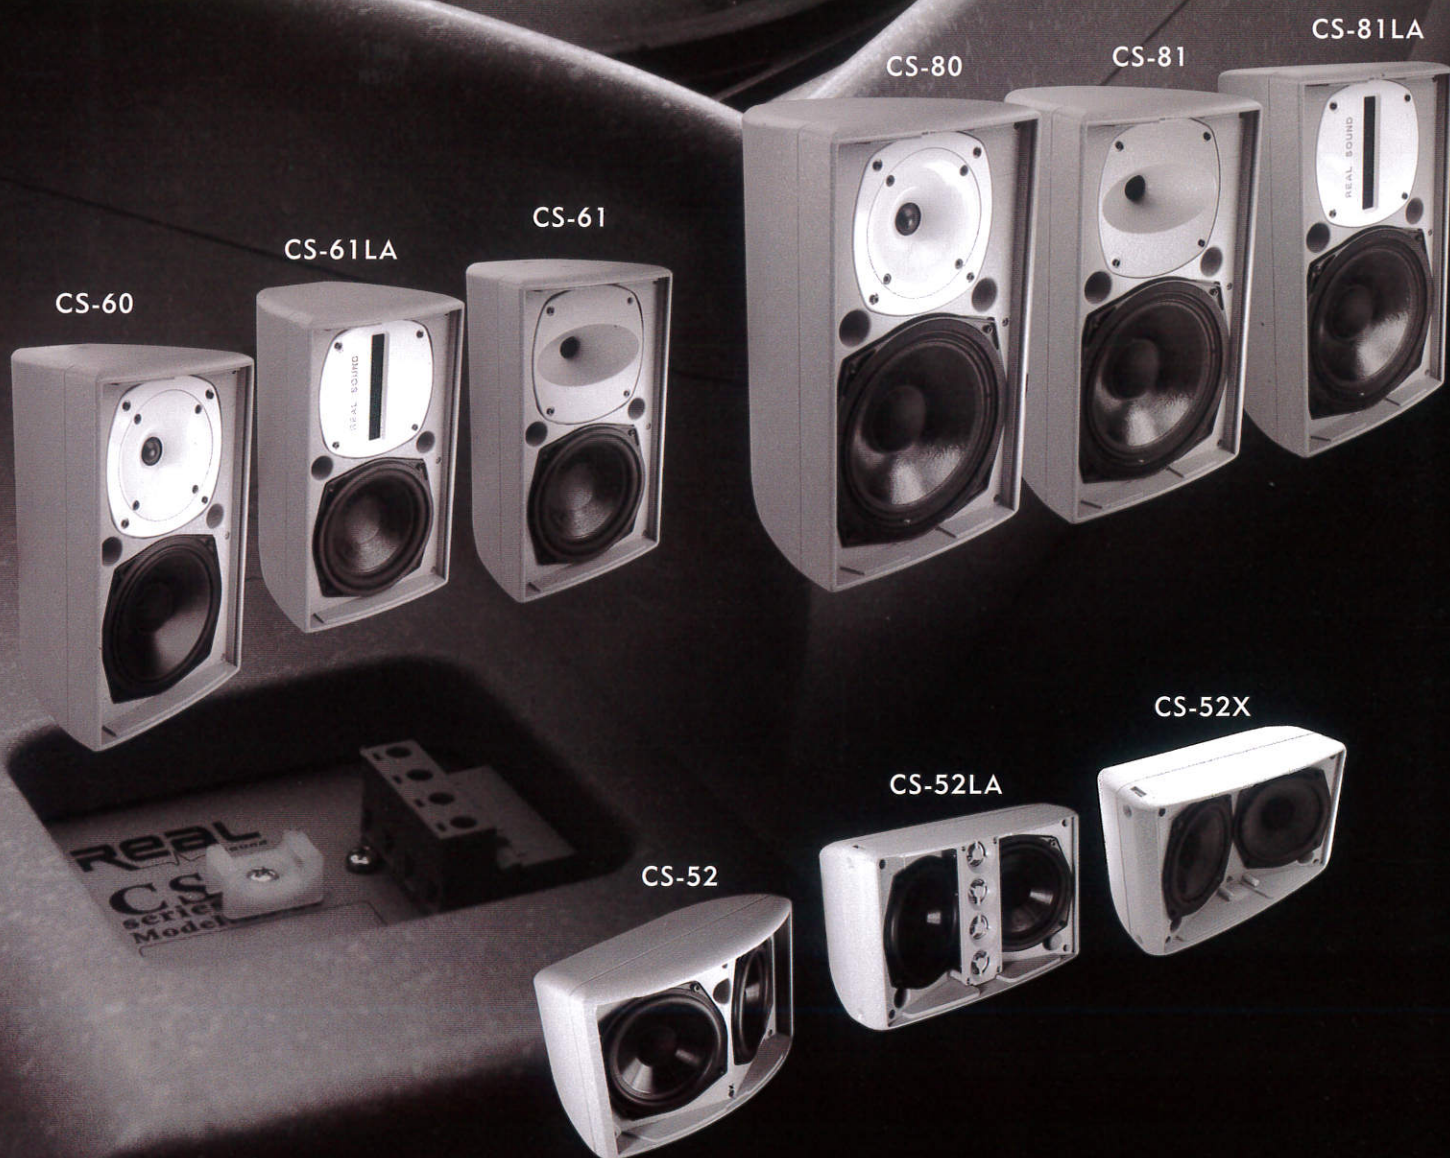


CS Series

CS Series power pack for the mobile entertainer

- Clubs, bars and restaurants
- Theatres
- Places of worshi
- Meeting


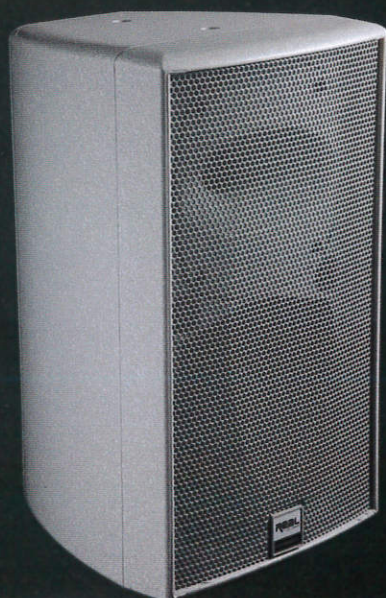


REAL
Sound

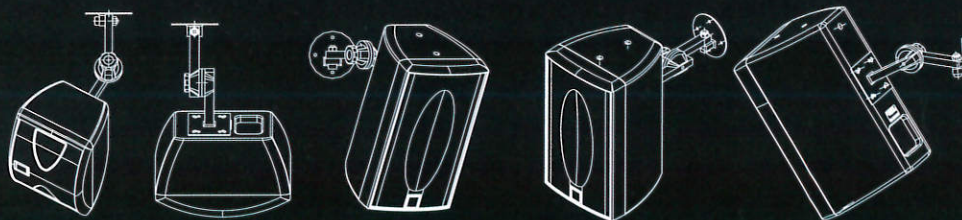
CS Series

CS Applications

- Applicable in distributed installation of fixed
- Vertical and horizontal use
- Complete coupling technique, predictable coverage
- Superior analytical, space-saving, strong power
- Complete, professional suspension system
- Lightweight structural foam shell










CS-ACC2
CS-52/CS-52x/CS-52LA



CS-ACC1
CS-52/CS-52x/CS-52LA
CS-60/CS-61/CS-61LA
CS-80/CS-81/CS-81LA

CS Sereis power pack for the mobile entertainer

- Clubs, bars and restaurants
- Theatres
- Places of worshi
- Meeting

	CS-52 	CS-52X 	CS-52LA 
System Power Rating	80w AES, 360w Peak	80w AES, 320w Peak	100w AES, 400w Peak
Frequency Range(±3dB)	100Hz-20KHz	100Hz-20KHz	75Hz-20KHz
Impedance	4ohm/16ohm	4ohm/16ohm	16ohm
Sound Pressure Level(1w/1m)/max.cont.	91dB/109dB SPL	91dB/109dB SPL	91dB/109dB SPL
Crossover Frequency(H x V)	120°x60°	60°x60°	100°x15°
Enclosure	5 Litre, structural foamed ABS	5 Litre, structural foamed ABS	5 Litre, structural foamed ABS
Drivers	2x5.25inch Bass Driver	2x5.25inch Bass Driver	2x5.25inch C Driver
Dispersion Coverage	2X5.25inch ICT Driver	2X5.25inch ICT Driverr	2x0.5inch HF Driver
Dimensions wxhxd(inch)	11.41x7.14x7.07	11.41x7.14x6.97	11.41x7.14x6.97
wxhxd(millimetre)	290x181x179	290x181x177	290x181x177
Weight(Kg)	5	6	6.5
Connectors	Low profile 12 amp push-lock	Low profile 12 amp push-lock	Low profile 12 amp push-lock
	CS-60 	CS-61 	CS-61LA 
System Power Rating	100w AES, 400w Peak	150w AES, 600w Peak	150w AES, 600w Peak
Frequency Range(±3dB)	80Hz-20KHz	80Hz-20KHz	80Hz-20KHz
Impedance	8ohm	8ohm	16ohm
Sound Pressure Level(1w/1m)/max.cont.	91dB/110dB SPL	96dB/115dB SPL	LF:98dB/128dB ,HF:110dB/125dB
Crossover Frequency(H x V)	90°x90°	120°x60°	120°x10°
Enclosure	5 Litre, structural foamed ABS	5 Litre, structural foamed ABS	5 Litre, structural foamed ABS
Drivers	1x6inch Bass Driver	1x6inch Bass Driver	1x6inch Bass Driver
Dispersion Coverage	1x1inch Compression Driver	1x1inch Compression Driver	1x1inch Compression Driver
Dimensions wxhxd(inch)	8.16x13.79x8.34	8.16x13.79x8.34	8.16x13.79x8.34
wxhxd(millimetre)	207x350x212	207x350x212	207x350x212
Weight(Kg)	6.5	7.5	7
Connectors	Low profile 12 amp push-lock	Low profile 12 amp push-lock	Low profile 12 amp push-lock
	CS-80 	CS-81 	CS-81LA 
System Power Rating	120w AES, 480w Peak	200w AES, 800w Peak	200w AES, 800w Peak
Frequency Range(±3dB)	70Hz-20KHz	70Hz-20KHz	80Hz-20KHz
Impedance	8ohm	8ohm	16ohm
Sound Pressure Level(1w/1m)/max.cont.	91dB/110dB SPL	97dB/116dB SPL	LF:99dB/128dB ,HF:110dB/125dB
Crossover Frequency(H x V)	90°x90°	120°x60°	120°x10°
Enclosure	5 Litre, structural foamed ABS	5 Litre, structural foamed ABS	5 Litre, structural foamed ABS
Drivers	1x8inch Bass Driver	1x8inch Bass Driver	1x8inch Bass Driver
Dispersion Coverage	1x1inch Compression Driver	1x1inch Compression Driver	1x1inch Compression Driver
Dimensions wxhxd(inch)	8.93x15.37x9.14	8.93x15.37x9.14	8.93x15.37x9.14
wxhxd(millimetre)	227x390x232	227x390x232	227x390x232
Weight(Kg)	8	9	8.5
Connectors	Low profile 12 amp push-lock	Low profile 12 amp push-lock	Low profile 12 amp push-lock