


CTX-40

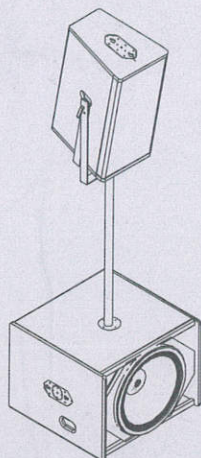

### Applications

- Theatres and theatrical sound reinforcement
- Houses of worship
- Portable and installed AV systems
- Center and sidefill in large-scale systems
- Concert Halls
- Distributed systems in stadiums and theme parks
- Nightclubs

### 应用

- 剧场扩声
- 大型集会场所
- 流动和固定AV系统
- 大型系统的中区 and 侧区补声
- 演艺中心及多功能厅
- 主题公园、体育馆的分布式系统
- 酒吧及俱乐部
- 固定安装



## CTX Series

### CTX-10

### CTX-40

### CTX-18B

Configuration	3-Way line source loudspeaker	3-Way line source loudspeaker	Direct Radiating Subwoofer
Components LF	2x10inch(63mm voice coil)	2x10inch(63mm voice coil)	18inch(100mm voice coil)
MF/HF Coaxial mounted	6.5inch(38mm voice coil) 2inch(44mm voice coil)	6.5inch(38mm voice coil) 2inch(44mm voice coil)	----
Power rating LF	500w AES/1800w Peak	500w AES/1800w Peak	600w AES/2400w Peak
MF/HF Coaxial	200w AES/800w Peak	200w AES/800w Peak	----
	60w AES/240w Peak	60w AES/240w Peak	----
Frequency response(±3dB)	65Hz-20KHz	65Hz-20KHz	35Hz-250Hz
Sensitivity 1m/1w LF	98dB/132dB	98dB/132dB	99dB/133dB
MF/HF Coaxial	104dB/134dB	104dB/134dB	----
	110dB/136dB	110dB/136dB	----
Nominal impedance	8Ω	8Ω	8Ω
Cabinet/channel QD-5+	2	3 or 2	4
Dispersion(HxV)	90°x10°	60°x45°	----
Crossover points	70Hz, 600Hz, 5kHz Bi-amp 70Hz, 600Hz	70Hz, 600Hz, 5kHz Bi-amp 70Hz, 600Hz	----
Connectors	2xNeutrik NL8 Speakon	2xNeutrik NL4 Speakon	2xNeutrik NL4 Speakon
Enclosure	15mm 9-ply birch plywood	15mm 9-ply birch plywood	18mm 11-ply birch plywood
Dimensions mm(HxWxD)	325x658x440	325x658x440	488x658x640
Dimensions inch(HxWxD)	12.81x25.93x17.34	12.81x25.93x17.34	19.23x25.93x24.12
Weight kg	23	23	35
Option Special Colour	yes	yes	yes
Option Weather Resistant	yes	yes	yes
Optional Fixed or Mobile	yes	yes	yes
Installation Accessories			

