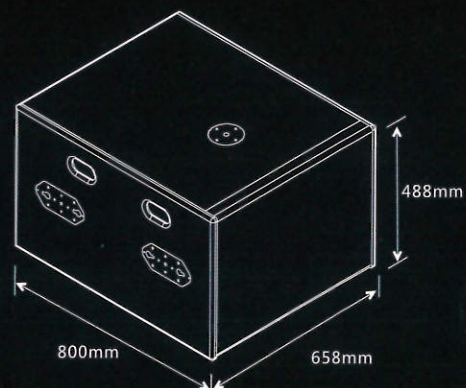
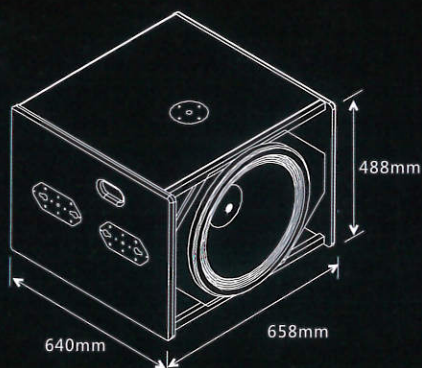


**DFT Series****DFT-180****DFT-215**

|                                 |                            |                            |
|---------------------------------|----------------------------|----------------------------|
| Configuration                   | Direct Radiating Subwoofer | Passive Cardioid Subwoofer |
| Components LF:                  | 18inch(100mm voice coil)   | 2x15inch(100mm voice coil) |
| Power rating LF:                | 600w AES/2400w Peak        | 1000w AES/2000w Peak       |
| Frequency response( $\pm 3$ dB) | 35Hz-150Hz                 | 38Hz-150Hz                 |
| Sensitivity 1m/1w LF:           | 99dB/130dB                 | 99dB/130dB                 |
| Nominal impedance               | 8 $\Omega$                 | 4 $\Omega$                 |
| Cabinet/channel QD-5+           | 8                          | 4                          |
| Crossover                       | 30Hz-100Hz                 | 40Hz-100Hz                 |
| Connectors                      | 2xNeutrik NL4 Speakon      | 2xNeutrik NL4 Speakon      |
| Enclosure                       | 18mm 11-ply birch plywood  | 18mm 11-ply birch plywood  |
| Dimensions mm(HxWxD)            | 488x658x640                | 488x658x800                |
| Dimensions inch(HxWxD)          | 19.23x25.93x24.12          | 19.23x25.93x31.52          |
| Weight kg                       | 31                         | 38                         |
| Option Special Colour           | yes                        | yes                        |
| Option Weather Resistant        | yes                        | yes                        |
| Optional Fixed or Mobile        | yes                        | yes                        |
| Installation Accessories        |                            |                            |

**DFT-180****DFT-215**