
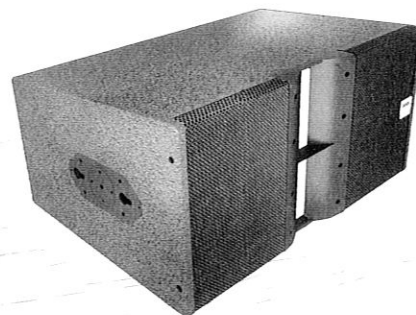
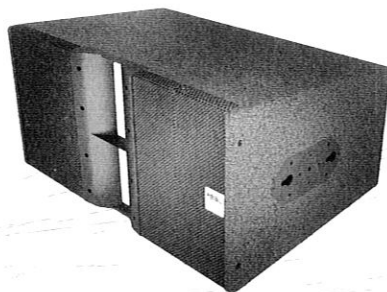
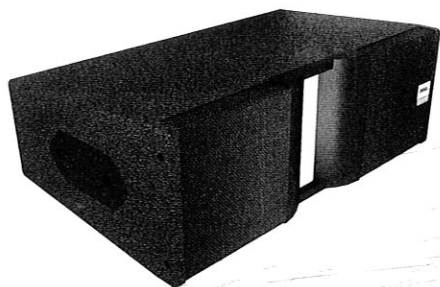




DFT Series	DFT-310	DFT-410	DFT-510
Configuration	2-way line source loudspeaker	2-way line source loudspeaker	2-way line source loudspeaker
Components LF	2x8inch(64mm voice coil)	2x10inch(64mm voice coil)	4x6.5inch(50mm voice coil)
MF	----	----	----
HF	3inch(75mm voice coil)	2x2inch(44mm voice coil)	2x2inch(44mm voice coil)
Power rating LF	500w AES/2000w Peak	500w AES/2000w Peak	500w AES/2000w Peak
MF	----	----	----
HF	100w AES/400w Peak	120w AES/480w Peak	120w AES/480w Peak
Frequency response(±3dB)	50Hz-18KHz	50Hz-20KHz	60Hz-20KHz
Sensitivity 1m/1w LF	99dB/135dB,	99dB/137dB	98dB/130dB
MF	----	----	----
HF	112dB/139dB	112dB/139dB	112dB/139dB
Nominal impedance	8Ω	16Ω	8Ω
Cabinet/channel QD-5	3 or 2	3 or 2	4 or 3
Dispersion(HxV)	120°x10°	120°x10°	120°x10°@-6dB points
Crossover	1.6KHz	60Hz-2.2KHz	70Hz-2.2KHz
Connectors	2xNeutrik NL4 Speakon	2xNeutrik NL4 Speakon	2xNeutrik NL4 Speakon
Enclosure	15mm 9-ply birch plywood	15mm 9-ply birch plywood	15mm 9-ply birch plywood
Dimensions mm(HxWxD)	224x658x440	365x658x440	365x658x425
Dimensions inch(HxWxD)	8.82x25.93x17.34	14.38x25.93x17.34	14.38x25.93x16.75
Weight kg	30	30	32
Option Special Colour	yes	yes	yes
Option Weather Resistant	yes	yes	yes
Optional Fixed or Mobile	yes	yes	yes
Installation Accessories			

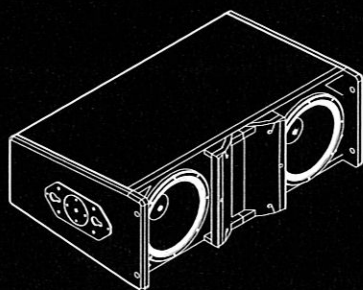

DFT-310

DFT-410

DFT-510