


DFT Series	DFT-415/440	DFT-715/740/715A/740A
Configuration	2-way Loudspeaker	2-way Loudspeaker
Components LF	1x10inch(75mm voice coil)	1x12inch(100mm voice coil)
HF	1x3inch(75mm voice coil)	1x3inch(75mm voice coil)
Power rating LF	400w AES/1600w Peak	450w AES/1800w Peak
HF	80w AES/320w Peak	80w AES/320w Peak
Frequency response(± 3 dB)	65Hz-18KHz	60Hz-18KHz
Sensitivity 1m/1w LF	98dB	99dB,
MF	----	----
HF	112dB/130dB,	112dB/138dB,
Nominal impedance	16 Ω	16 Ω
Cabinet/channel QD-5	3	3 or 4
Dispersion(HxV)	110°x15° /110°x40°	110°x15° /110°x40°
Crossover	1.5KHz	1.5KHz
Connectors	2xNeutrik NL4 Speakon	2xNeutrik NL4 Speakon
Enclosure	15mm 9-ply birch plywood	15mm 9-ply birch plywood
Dimensions mm(HxWxD)	325x658x440	325x658x440
Dimensions inch(HxWxD)	12.80x25.93x17.34	12.80x25.93x17.34
Weight kg	25	34
Option Special Colour	yes	yes
Option Weather Resistant	yes	yes
Optional Fixed or Mobile	yes	yes
Installation Accessories		
Ac power requirements	----	2A,230v,50/60Hz Class D two channel amplifier 2400w(40hm) LF+700W(40hm) HF drive 2pcs

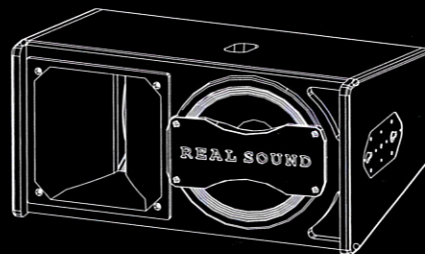

DFT-415/440

DFT-715/740/715A/740A