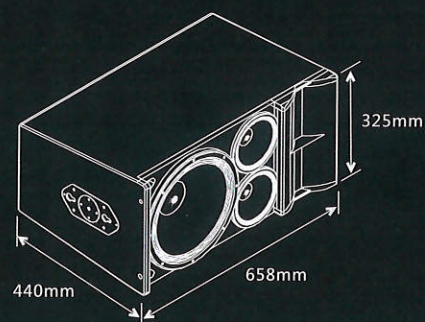
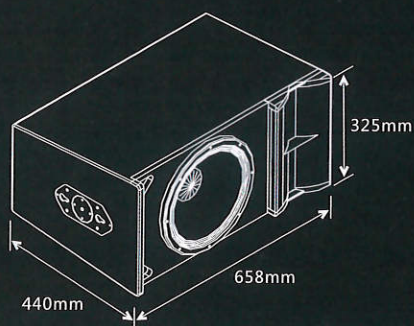


DFT Series**DFT-710 / DFT-710D****DFT-910 / DFT-910D**

Configuration	2-way line source loudspeaker	3-way line source loudspeaker
Components LF	1x12inch(75mm voice coil)	1x12inch(100mm voice coil)
MF		2x6.5inch
HF	1x3inch(75mm voice coil)	2x2inch(44mm voice coil)
Power rating LF	450w AES/1800w Peak	450w AES/1800w Peak
MF	----	200w AES/800w Peak
HF	80w AES/320w Peak	120w AES/480w Peak
Frequency response(±3dB)	60Hz-20KHz	60Hz-20KHz
Sensitivity 1m/1w LF	99dB/135dB	100dB/136dB
MF	----	102dB/138dB
HF	112dB/139dB	112dB/139dB
Nominal impedance	8Ω	8Ω
Cabinet/channel QD-5+	4	2 or 3
Dispersion(HxV)	120°x10° / 90°x10°	120°x10° / 90°x10°
Crossover	70Hz, 1.2KHz	70Hz,480Hz,3.2KHz
Connectors	2xNeutrik NL4 Speakon	2xNeutrik NL8 Speakon
Enclosure	15mm 9-ply birch plywood	15mm 9-ply birch plywood
Dimensions mm(HxWxD)	325x658x440	325x658x440
Dimensions inch(HxWxD)	12.80x25.93x17.34	12.80x25.93x17.34
Weight kg	28	30
Option Special Colour	yes	yes
Option Weather Resistant	yes	yes
Optional Fixed or Mobile	yes	yes
Installation Accessories		

**DFT-710 / DFT-710D****DFT-910 / DFT-910D**