

# DS Series

## All DS series speaker cabinets share the following features

- supported with a full range of mounting and flying accessories.
- Compound-wood cabinets, finished with rugged water-based texture lacquer
- connector panel with 2 speakon connectors
- recessed metal handles
- high-efficiency bass speakers with strong die-cast aluminum frame
- electronic protection for midrange and high range speakers
- baltic birch ply finished with textured, polyurethane black coating


### DS-1520

A 2-way full range system in a trapezoidal enclosure. Loudspeaker compliment consists of a 15inch(75mm voice coil) ferrite magnet LF woofer in a ported sub-enclosure, and a 2inch(44mm voice coil) ferrite magnet compression HF driver mounted on a 60° x 40° horn. Rotatable 8 positions horn, The loudspeaker enclosure shall be rectangular in shape. It is constructed of 18mm thickness high density plywood and employs extensive internal bracing support. Handles are balance optimized to facility transportation. Perforated steel is employed for


### DS-1515

A 2-way full range system in a trapezoidal enclosure. Loudspeaker compliment consists of an dual 15inch(75mm voice coil) ferrite magnet LF woofer in a ported sub-enclosure, and a single 2inch (44mm voice coil) ferrite magnet compression HF driver mounted on a 60° x 40° horn. Rotatable 8 positions horn, The loudspeaker enclosure shall be rectangular in shape. It shall be constructed of 18mm thickness high density plywood and shall employ extensive internal bracing. Handles are balance-optimized to facility transportation. perforated steel is employed for frontal protection of the loudspeaker compliment.

**DS-1520**  
Full Range

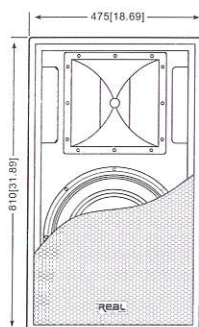

**DS-1515**  
Full Range

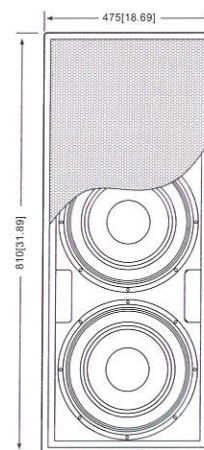

## DS Series

Model:	DS-1520	DS-1515
System Power Rating	400w AES, 1600w Peak	800w AES, 3200w Peak
Frequency Range(±3dB)	50Hz-18KHz	45Hz-18KHz
Impedance	8ohm	4ohm
Sound Pressure Level(1w/1m)/max.cont.	101dB/135dB SPL	102dB/138dB SPL
Coverage (H x V)	70° x 40°	70° x 40°
Transducers LF	15inch Bass Driver	2x15inch Bass Driver
M/HF	2inch Compression Driver	2inch Compression Driver
Dimensions wxhxd(inch)	18.70x31.90x24.00	18.70x45.67x24.00
wxhxd(millimetre)	475x810x610	475x1160x610
Weight(Kg)	40	55
Connectors	2 x Neutrik NL4 Speakon	2 x Neutrik NL4 Speakon

Specifications

**REAL**  
Sound

For further descriptions please visit our homepage at [www.realsound-audio.com](http://www.realsound-audio.com) 29