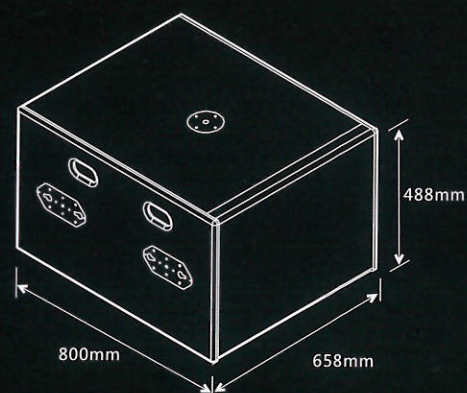
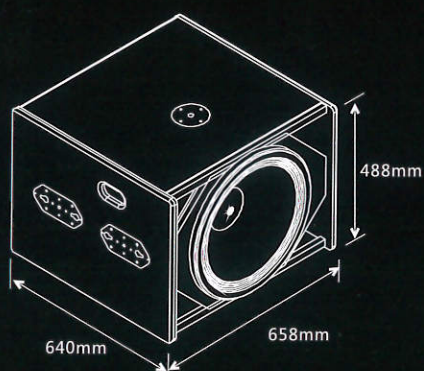


HFT Series**HFT-180****HFT-215**

Configuration	Direct Radiating Subwoofer	Passive Cardioid Subwoofer
Components LF:	18inch(100mm voice coil)	2x15inch(100mm voice coil)
Power rating LF:	500w AES/2000w Peak	1000w AES/2000w Peak
Frequency response(± 3 dB)	35Hz-150Hz	38Hz-150Hz
Sensitivity 1m/1w LF:	99dB/130dB	99dB/130dB
Nominal impedance	8 Ω	4 Ω
Cabinet/channel QD-5+	8	4
Crossover	30Hz-100Hz	35Hz-100Hz
Connectors	2xNeutrik NL4 Speakon	2xNeutrik NL4 Speakon
Enclosure	18mm 11-ply birch plywood	18mm 11-ply birch plywood
Dimensions mm(HxWxD)	488x658x640	488x658x800
Dimensions inch(HxWxD)	19.23x25.93x24.12	19.23x25.93x31.52
Weight kg	28	35
Option Special Colour	yes	yes
Option Weather Resistant	yes	yes
Optional Fixed or Mobile	yes	yes
Installation Accessories		

**HFT-180****HFT-215**