







Kmax Series

Kmax-915

Kmax-1559x

Kmax-1228x

Configuration	3-way Line Array	3-way Line Array	3-way Line Array
Components LF:	2x15inch(75mm voice coil)	2x15inch(100mm voice coil)	2x12inch(100mm voice coil)
MF:	4x6.5inch(50mm voice coil)	4x6.5inch(50mm voice coil)	4x6.5inch(38mm voice coil)
HF:	3x3inch(75mm voice coil)	2x3inch(75mm voice coil)	3x2inch(44mm voice coil)
Power rating LF:	1000w AES/4000w Peak	1200w AES/4800w Peak	1000w AES/4000w Peak
MF:	600w AES/2400w Peak	600w AES/2400w Peak	400w AES/1600w Peak
HF:	300w AES/1200w Peak	300w AES/1200w Peak	250w AES/1000w Peak
Frequency response(±3dB)	45Hz-20KHz	45Hz-20KHz	50Hz-20KHz
Sensitivity 1m/1w LF:	100dB/134dB	100dB/134dB	99dB/134dB
MF:	104dB/136dB	104dB/136dB	104dB/136dB
HF:	119dB/143dB	116dB/139dB	115dB/139dB
Nominal impedance	LF: 8Ω MF: 8Ω HF: 8Ω	LF: 8Ω MF: 8Ω HF: 16Ω	LF: 8Ω MF: 8Ω HF: 8Ω
Cabinet/channel QD-5+	2	2	2
Dispersion(HxV)	90°x10°(250Hz-20KHz)	90°x5°(250Hz-20KHz)	120°x10°(450Hz-20KHz)
Crossover	280Hz,1.5KHz active	250Hz,1.5KHz active	454Hz,3.5KHz active
Connectors	2xNeutrik NL8 Speakon	2xNeutrik NL8 Speakon	2xNeutrik NL8 Speakon
Enclosure	18mm 11-ply birch plywood	18mm 11-ply birch plywood	18mm 11-ply birch plywood
Dimensions mm(HxWxD)	405x1364x535	410x1278x630	388x1278x630
Dimensions inch(HxWxD)	15.96x53.74x21.08	16.15x50.35x24.80	15.27x50.35x24.80
Weight kg	85	85	90

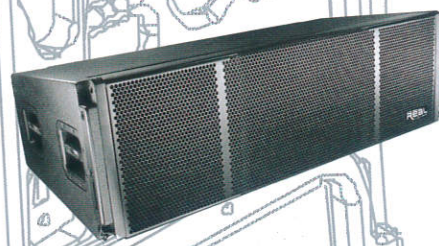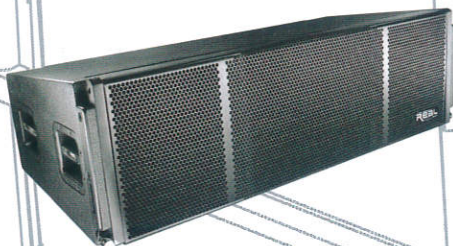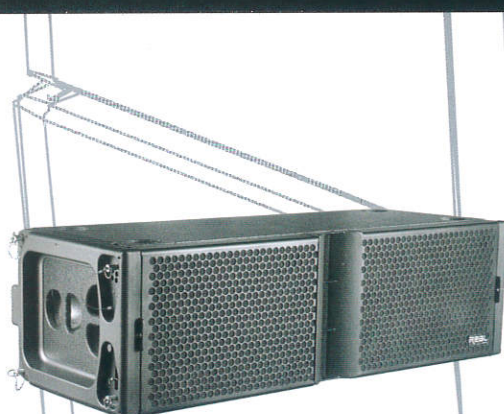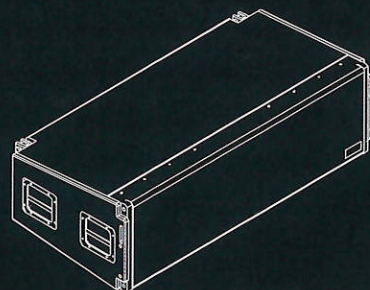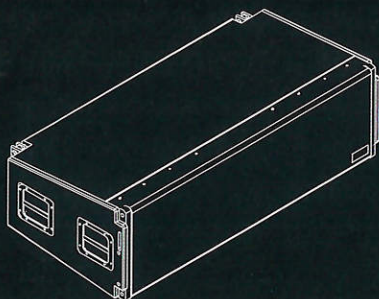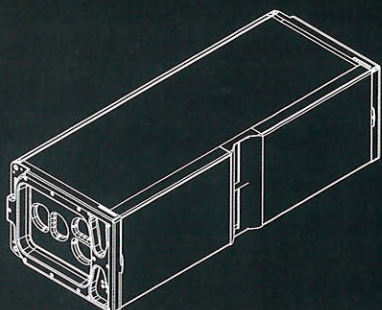

Kmax-915

Kmax-1559x

Kmax-1228x