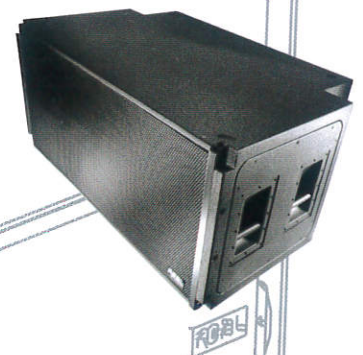
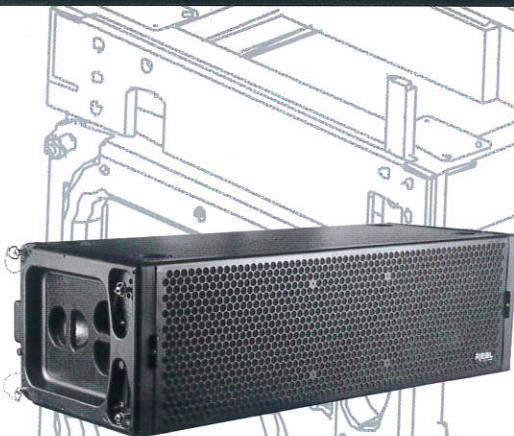

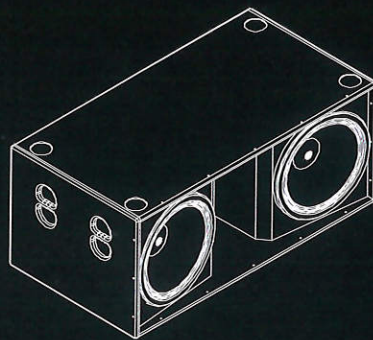
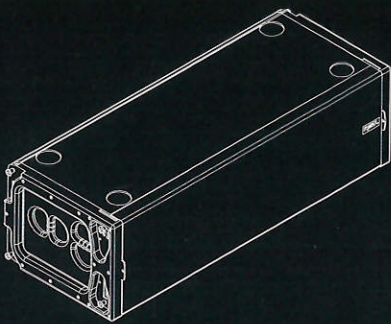


Kmax Series**Kmax-915B****Kmax-218B****Kmax-1228xsub**

Configuration	Line Array Subwoofer	Line Array Subwoofer	Line Array Subwoofer
Components LF:	2x15inch(100mm voice coil)	2x18inch(100mm voice coil)	2x18inch(125mm voice coil)
Power rating LF:	1000w AES/4000w Peak	1200w AES/4800w Peak	1400w AES/5600w Peak
Frequency response(± 3 dB)	38Hz-150Hz	35Hz-150Hz	35Hz-300Hz
Sensitivity 1m/1w LF:	100dB/135dB	100dB/135dB	102dB/137dB
Nominal impedance	4 Ω	4 Ω	4 Ω
Cabinet/channel QD-5+	2	2	1
Crossover	L-R 24dB/oct;38-130Hz	L-R 24dB/oct;35-100Hz	L-R 24dB/oct;35-150Hz
Connectors	4xNeutrik NL4 Speakon	2xNeutrik NL4 Speakon	2xNeutrik NL4 Speakon
Enclosure	18mm 11-ply birch plywood	18mm 11-ply birch plywood	18mm 11-ply birch plywood
Dimensions mm(HxWxD)	405x1364x535	550x1300x780	580x1278x780
Dimensions inch(HxWxD)	15.96x53.74x21.08	21.67x51.22x17.58	22.83x50.35x30.71
Weight kg	80	100	128

**Kmax-915B****Kmax-218B****Kmax-1228sub**