


# Hardware



## Tools-1

Synthesize Connect the line plank

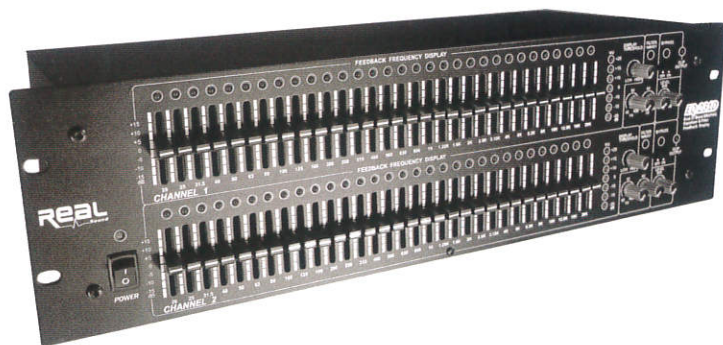

## GEQ-231D

|                                    |                                              |
|------------------------------------|----------------------------------------------|
| S/N Rate(A weight)                 | >95dB                                        |
| Frequency response                 | 20Hz-20KHz+/-0.5dB                           |
| THD%                               | <0.01%                                       |
| Precision of the central frequency | >90%                                         |
| Filter of input                    | HI-pass 3KHz-20KHz;LO-pass 40Hz-400Hz        |
| The max increases & Reduces        | +/-15dB                                      |
| Dynamic range                      | 118dB                                        |
| Input gain                         | -∞ - +6dB                                    |
| Indicator                          | Power,output VU,output clip,Feedback         |
| Input impedance                    | Balance 20K $\Omega$ /Unbalance 10K $\Omega$ |
| Output impedance                   | Balance 300 $\Omega$ /Unbalance 150 $\Omega$ |
| Input connector                    | XLR(1G,2+,3-),                               |
| Output connector                   | TRS(Tip+)                                    |
| Packing dimensions                 | 585x260x170mm                                |
| Gross weinght                      | 6.70kg                                       |



## Tools-5

|                          |                                                          |
|--------------------------|----------------------------------------------------------|
| Channel Number           | 8(out16)                                                 |
| Loading Per Channel      | 220v/10a, 1500w/channel                                  |
| Sequence Time Per Step   | 1 Secretary                                              |
| Link                     | Alllow                                                   |
| Lamp Voltage             | Ac/12v                                                   |
| Control                  | Sequence on/off-lock Switch,lamp-on Switch,bypass-button |
| Link Cable               | 3-core,micphone Cable                                    |
| Indicator                | Power/channel On/bypass                                  |
| Control Signal Connector | Trs                                                      |
| Packing Dimensions       | 2u                                                       |
| Gross Weight             | 5kg                                                      |