

Ktwo Series

All models out of the Ktwo series designed for

- Excellent sound
- Compact size
- Low weight
- versatile
- Versatile setup combinations
- Bi-Amplifier or single-Amplifier

Ktwo-15P

A 3-way full range system in a trapezoidal enclosure. Includes single 15inch(100mm voice coil) ferrite magnet LF woofer, a 3inch(75mm voice coil) ferrite magnet MF compression driver and a 1inch(34mm voice coil) ferrite magnet HF compression driver. The LF driver is mounted on a rotatable 70° x40° constant directivity HF horn. The enclosure is constructed with 18mm thickness high-density plywood and employ extensive internal bracing support. It is finished in wear-resistant textured black paint for wear resistance and durability. A standard tripod/polemount adaptor is included. Perforated steel is employed for frontal protection of the loudspeaker component.

Ktwo-152P



A 3-way full range system in a trapezoidal enclosure. Includes dual 15inch(100mm voice coil) ferrite magnet LF woofer, a 3inch(75mm voice coil) ferrite magnet MF compression driver and a 1inch(34mm voice coil) ferrite magnet HF compression driver. The LF driver shall be mounted on a rotatable 70°x40° constant directivity HF horn .. It shall be constructed of 18mm thickness high density plywood and shall employ extensive internal bracing. It shall be finished in wear-resistant textured black paint, dadoed for strength and durability. A standard tripod/polemount adaptor is included. Perforated steel is employed for frontal protection of the loudspeaker complement.



Ktwo-15P
Full Range



Ktwo-152P
Full Range

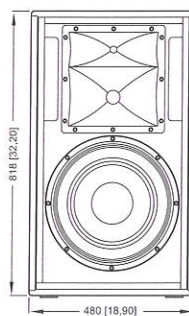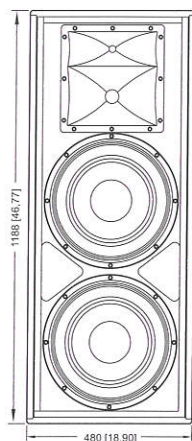

Ktwo Series



Ktwo Series

Specifications

Model:	KTWO-15P	KTWO-152P
System Power Rating	500w AES, 2000w Peak	1100w AES, 4400w Peak
Frequency Range(±3dB)	50Hz-20KHz	45Hz-20KHz
Impedance	8ohm	4ohm
Sound Pressure Level(1w/1m)/max.cont.	101dB/137dB SPL	102dB/138dB SPL
Coverage (H x V)	70° x 40°	70° x 40°
Transducers LF	15inch LF Drivers	2x15inch LF Drivers
M/HF	3inch&1inch Compression Drivers	3inch&1inch Compression Drivers
Dimensions wxhxd(inch)	18.90x32.20x24.33	18.90x46.77x24.33
wxhxd(millimetre)	480x818x618	480x1188x618
Weight(Kg)	47	67
Connectors	2 x Neutrik NL4 Speakon	2 x Neutrik NL4 Speakon

REAL
Sound

All Ktwo series speaker cabinets share the following features


- supported With A Full Range Of Mounting And Flying Accessories.
- compound-wood Cabinets, Finished With Rugged Water-based Texture Lacquer
- connector Panel With 2 Speakon Connectors
- recessed Metal Handles
- high-efficiency Bass Speakers With Strong Die-cast Aluminum Frame
- electronic Protection For Midrange And High Range Speakers
- baltic Birch Ply Finished With Textured, Polyurethane Black Coating

Ktwo System applications

- Near-field touring, installed TS for clubs, A/V,theater, broadcast, etc.
- Stadiums, Arenas and concert halls
- Theater,night clubs, and houses of worship
- Stage monitor side fill
- Can be used as a stand alone system
- Houses of worship, medium to large theatres and night clubs
- All purpose, compact,flyable subwoofer



Ktwo-212P
Full Range

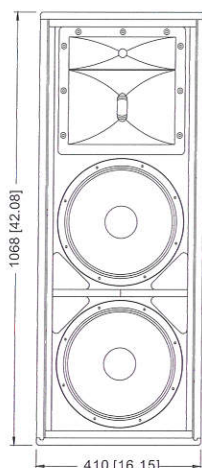

Ktwo-212P

A 3-way full range system in a trapezoidal enclosure. Includes dual 12inch(100mm voice coil) ferrite magnet LF woofer, a 3inch(75mm voice coil)ferrite magnet MF compression driver and a 1inch(34mm voice coil) ferrite magnet HF compression driver.The LF driver shall be mounted on a rotatable 70°x40° constant directivity HF horn .. It shall be constructed of 18mm thickness high density plywood and shall employ extensive internal bracing. It shall be finished in wear-resistant textured black paint. daded for strength and durability. A standard tripod/polemount adaptor is included. Perforated steel is employed for frontal protection of the loudspeaker compliment.

Ktwo-218B


The Ktwo-218B is a multi-functional,ultra-compact, transducers installed in a vented rectangular enclosure. High output dual 18inch(115mm voice coil) ferrite magnet subwoofer system capable of creating low frequency response down to 30Hz.Its compact design makes it the perfect choice for tight truck-packs or where floor space is at a premium. It is constructed of 18mm thickness high-density plywood and employs extensive internal bracing. It is constructed with 18mm thickness high -density plywood and with extensive internal bracing support.The enclosure is in water-resistant textured black paint for wear resistance and durability. Handles are located on the balanced optimized position for comfortable carrying. Perforated steel is employed for frontal protection of the loudspeaker component.

Ktwo-18B


The Ktwo-18B is a multi-functional,ultra-compact, transducers installed in a vented rectangular enclosure. High output dual 18inch(115mm voice coil) ferrite magnet subwoofer system capable of creating low frequency response down to 30Hz.Its compact design makes it the perfect choice for tight truck-packs or where floor space is at a premium. It is constructed of 18mm thickness high-density plywood and employs extensive internal bracing. It is constructed with 18mm thickness high -density plywood and with extensive internal bracing support.The enclosure is in water-resistant textured black paint for wear resistance and durability. Handles are located on the balanced optimized position for comfortable carrying. Perforated steel is employed for frontal protection of the loudspeaker component.



Ktwo-218B
Subwoofer

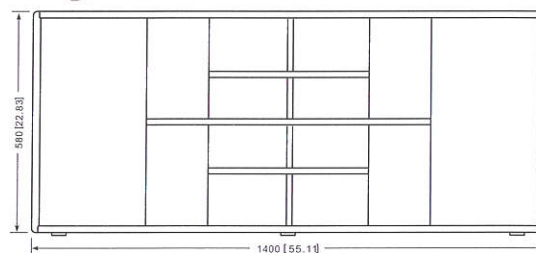

Ktwo-18B
Subwoofer



Ktwo Series

Model:	Ktwo-212P	Ktwo-18B	Ktwo-218B
System Power Rating	1100w AES, 4400w Peak	650w AES, 2600w Peak	1300w AES, 5200w Peak
Frequency Range(±3dB)	55Hz-20KHz	35Hz-300Hz	35Hz-300Hz
Impedance	4ohm	8ohm	4ohm
Sound Pressure Level(1w/1m)/max.cont.	100dB/136dB SPL	101dB/137dB SPL	102dB/137dB SPL
Coverage	90° x 45°	----	----
Transducers LF	2x12inch Cone Driver	18inch LF Driver	2x18inch LF Driver
M/HF	3inch&1inch Cone Driver	----	----
Dimensions wxhxd(inch)	16.15x42.08x19.23	22.83x27.56x28.35	55.11x22.83x30.70
wxhxd(millimetre)	410x1068x488	580x700x720	1400x580x780
Weight(Kg)	47	47	95
Connectors	2 x Neutrik NL4 Speakon	2 x Neutrik NL4 Speakon	2 x Neutrik NL4 Speakon