

# LED MOVING HEAD



MH-250SW

**LED**  
**SPOT**  
**WASH**  
**250W**


WEIGHT:  
14KG



SIZE (MM):  
357(D) X 224(W) X 505(H)

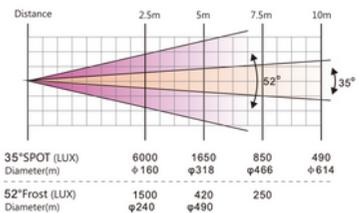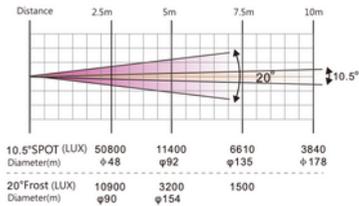

PHOTOMETRICS DIAGRAM

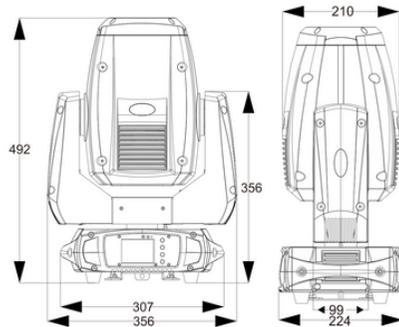

DIMENSIONS

WWW.AVSHK.COM


# FEATURES

MH-250SW


- A 250W WHITE LED LAMP, 7500K
- 50000 HOURS LIFE SPAN AND LOW POWER CONSUMPTION
- 8'16 BIT SMOOTH AND PRECISE RESOLUTION FOR PAN/TILT MOVEMENT
- 540°/630°/ 360°PAN AND 270°/180°/90° TILT MOVEMENT
- SCAN POSITION MEMORY, AUTO REPOSITION AFTER UNEXPECTED MOVEMENT
- SMOOTH LINEAR MOTORIZED ZOOM RANGING FROM 9°-36°
- GOBO SIZE 22.9MM (EXTERNAL DIMENSIONS)/16MM (INNER DIMENSIONS)
- 1 STATIC GOBO WHEEL WITH 11 GOBOS PLUS OPEN
- GOBO OVERLAY (GOBO MORPHING)
- 1 COLOR WHEEL WITH 9 COLOURS PLUS OPEN (AVAILABLE FOR HALF COLOR MODE)
- VARIABLE DIRECTION RAINBOW EFFECT WITH SPEED ADJUSTABLE
- GOBO TIME AND COLOR TIME CONTROLLABLE
- 2.5M-15M ELECTRIC FOCUS
- 3-FACET PRISM WITH VARIABLE SPEED AND DIRECTION
- 0-100% SMOOTH LINEAR LED DIMMER
- 25T/SEC HIGH SPEED LED SHUTTER/STROBE EFFECT WITH VARIABLE SPEED
- FROST FILTER (HYBRID EFFECT FOR WASH)
- 14/16/18 DMX CHANNELS USITT DMX-512 (VECTOR MODE 18CH)
- DMX512, MASTER-SLAVE, AND SOUND ACTIVATED CONTROLLABLE OR AUTO OPERATION(7
- BUILT-IN PROGRAMS)
- SOUND CONTROL WITH SENSITIVITY ADJUSTMENT
- 2.4" TFT LCD DISPLAY (320\*240PIX) WITH 4 CONTROL BUTTONS
- 180°REVERSIBLE FOR LCD DISPLAY
- LCD DISPLAY SWITCH-OFF AUTOMATICALLY AFTER 60 SECONDS
- DMX SIGNAL MONITORING INDICATOR AVAILABLE
- LOWER NOISE AND EFFICIENT FAN COOLING SYSTEM
- EFFICIENT LOW NOISE SELF ADJUSTING FAN COOLING SYSTEM
- CONSTANT TEMPERATURE READOUT AND MANAGEMENT FUNCTION
- OVER HEAT PROTECTION MANAGEMENT
- POWERCON IN/ OUT WITH POWER SWITCH AND FUSE
- 3-PIN DMX CONNECTORS IN/OUT
- IP20 PROTECTION RATING



ROTATING GOBO WHEEL

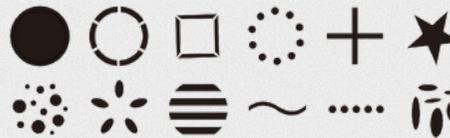

STATIC GOBO WHEEL

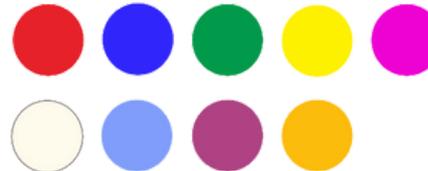

COLOR WHEEL

WWW.AVSHK.COM