
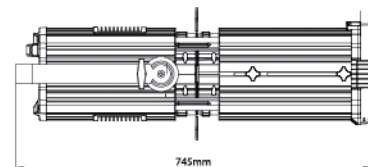



AVS - LED EZ 1528 - 300

300W LED IMAGING ZOOM SPOT

www.avshk.com


- 電源輸入：AC100V-240V, 50/60Hz
- LEDs: COB 集成, 300W, 白光
- 光通量: 27000lm - 33000lm
- LED 燈珠壽命: >50,000 小時
- 出光角度: 15° - 28°, 可調校
- 冷卻系統: 熱管配備無噪音風扇
- 插刀式不鏽鋼特殊造型切光板四件
- 控制模式: 國際標準 DMX 512 信號
- 防護等級: IP20
- 淨重: 9.2kgs ● 毛重: 11kgs
- 包裝尺寸: 745mm (長) x 276mm (闊) x 277mm (高)
- 功率: 350W
- 色溫: 3200K / 5600K
- 顯色指數 (CRI): 90Ra
- 電子調光: 0-100% 線性調光
- 電子頻閃: 1-20 次 / 秒
- 顯示屏: LCD 屏顯示
- 信號輸入與輸出: XLR 3Pin 與 XLR 5Pin
- 通道模式: 1 個通道 / 2 個通道
- 使用環境濕度: -20°C - 45°C

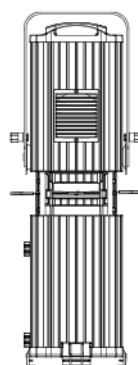

- Power Supply: AC100V-240V, 50/60Hz
- Power Consumption: 350W
- LEDs: COB, 300W, White
- Color Temperature: 3200K / 5600K
- Luminous flux: 27000lm - 33000lm
- CRI: 90Ra
- LED life: >50,000H
- Dimmer: 0-100% Dimmer Intensity
- Adjustable Beam angle: 15° - 28°
- Strobe: 1-20 Flash per second
- Cooling system: heat pipe with no noise fan
- Four-plane Resilient Stainless-steel
- Shutter Operates Handy Beam-Shaping and Free from Deformation
- Display: LCD screen display
- The signal input and output XLR 3Pin and XLR 5Pin
- Control mode: the international standard DMX 512 signal
- Channel mode: 1 channel or 2 channels
- Protection grade: IP20
- Use environment temperature: -20°C - 45°C
- N.W.: 9.2kgs ● G.W.: 11kgs
- Dimensions: 745mm (L) x 276mm (W) x 277mm (H)

DMX CONTROL CHANNEL				Mode 1	Mode 2
1	Dimmer Intensity 調光	000-007 (0-100%) 008-255		CH 1	CH1
2	Strobe 頻閃	000 001 255		CH2	

Color Temperature (色溫): 3200K / 5600K
CRI (顯色指數): ≥ 85Ra

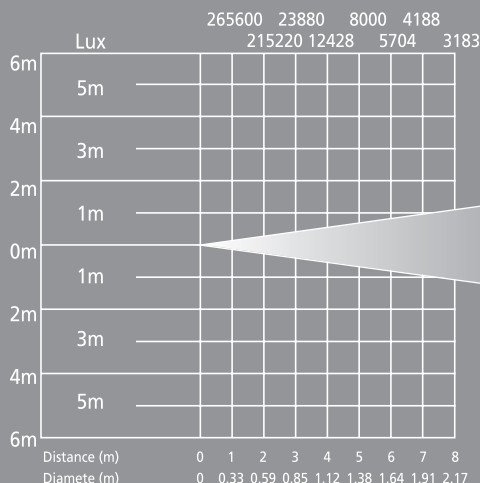

Color Temperature (色溫): 3200K / 5600K
CRI (顯色指數): ≥ 85Ra

