



# SCENA 650/1000



SCENA 650/1000 is a theatre light for 650/1000W lamps. SCENA 650/1000 is a distinct evolution in comparison with other lights in its category, offering operating features suitable for even the most demanding applications.



**PACKING**  
(LxDxH) 610 x 440 x 250 mm  
11 Kg  
Contains 2 units



### SCENA 650/1000 PC (Cod. 03.TS002.A)

- Anti-halo Ø 150mm lens
- Black colour

### SCENA 650/1000 FRESNEL (Cod. 03.TS002.F)

- Fresnel Ø 150mm lens
- Black colour

### SCENA 650/1000 OPTICAL (Cod. 03.TS002.O)

- Optical Ø 150mm lens
- Black colour

Also available with Aluminium white finishing (RAL 9006).

### Optical group

Anti-halo Ø 150mm lens or Optical Ø 150mm lens or Fresnel Ø 150mm lens  
Focal adjustment with endless screws from 10° to 64° (PC) or 13° to 53° (OPTICAL / FRESNEL) giving precision movement on a double track  
Spherical reflector in polished and treated 99.9% aluminium

### Lamp holder

GX9.5 lampholder for 650/1000 W lamps


### Construction

Extremely strong housing with aluminium edge profiles  
Frontal protection grille  
Boxed gel holder (with total elimination of parasite light)  
Reinforced bracket, with great increase in thickness  
Greater body size, with efficient internal ventilation labyrinth  
Easy lens access for dismantling and cleaning

### Power supply

230V 50/60Hz

CP70, GX9.5, 1000W

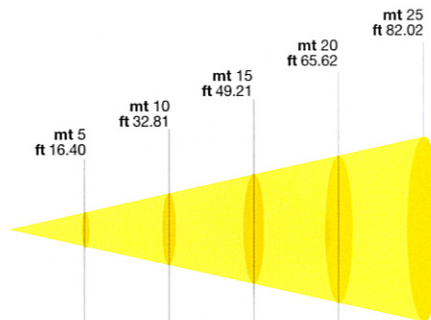

### APPROVED LAMPS

Model	Watt	Base	K°	Lumens	Life (Hours)	Use
CP67	650	GX9,5	3.200	16.500	400	Cine/TV
T21	650	GX9,5	3.050	13.000	900	Theatre
CP70	1.000	GX9,5	3.200	25.000	200	Cine/TV
TI19	1.000	GX9,5	3.050	21.500	750	Theatre

### ACCESSORIES

- Barndoor (black) (Cod. 03.TBD02)
- Barndoor (RAL 9006) (Cod. 03.TBD02.44)
- Gel filter holder (black) (Cod. 02.M00417.27)
- Gel filter holder (RAL 9006) (Cod. 02.M00417.44)
- "C" clamp G50 Black (max. load 10Kg) (cod. 0521A012)
- "C" clamp G50 Chrome (max. load 10Kg) (cod. 0521A012.20)
- Floor-stand (black) (cod. 0521A013)
- Floor-stand (chrome) (cod. 0521A013.20)
- Safety steel cable (3mm x 60 cm), Ring spring catch, max. capacity load 60Kg (cod. 0521A010)
- Gel filters (see page 206)

### SCENA 1000 PC

	5250	1313	583	328	210	
<b>Lux center</b>	5250	1313	583	328	210	
<b>Foot candles</b>	487,92	121,98	54,21	30,49	19,52	<b>Beam angle 10°</b>
<b>Diameter mt.</b>	0,87	1,75	2,62	3,50	4,37	
<b>Diameter ft.</b>	2,87	5,74	8,61	11,48	14,35	
<b>Lux center</b>	390	98	43	24	16	
<b>Foot candles</b>	36,25	9,06	4,03	2,27	1,45	<b>Beam angle 64°</b>
<b>Diameter mt.</b>	6,25	12,50	18,75	24,99	31,24	
<b>Diameter ft.</b>	20,50	41,00	61,50	82,00	102,50	

### SCENA 1000 FRESNEL

	4660	1165	518	291	186	
<b>Lux center</b>	4660	1165	518	291	186	
<b>Foot candles</b>	433,09	108,27	48,12	27,07	17,32	<b>Beam angle 13°</b>
<b>Diameter mt.</b>	1,14	2,28	3,42	4,56	5,70	
<b>Diameter ft.</b>	3,74	7,48	11,21	14,95	18,69	
<b>Lux center</b>	500	125	56	31	20	
<b>Foot candles</b>	46,47	11,62	5,16	2,90	1,86	<b>Beam angle 56°</b>
<b>Diameter mt.</b>	5,32	10,63	15,95	21,27	26,59	
<b>Diameter ft.</b>	17,44	34,89	52,33	69,78	87,22	